Lockheed Martin Corporation Corporate Environment, Safety & Health West Coast Projects Office 2550 North Hollywood Way, 3rd Floor, Burbank, CA 91505-1055 Facsimile 818:847:0256 or 818:847:0170

LOCKHEED MARTIN

Via Airborne Express RED0300/028 WBS #48

March 28, 2000

Mr. Gerard J. Thibeault Executive Officer California Regional Water Quality Control Board Santa Ana Region 3737 Main Street, Suite 500 Riverside, California 92501-3339

Dear Mr. Thibeault:

Subject:

January 2000 Data Reports
Water Supply Contingency Plan

Production Well Sampling Program
Crafton-Redlands Plume Project

In compliance with the approved Water Supply Contingency Plan, enclosed please find one copy of the **January 2000 Production Well Sampling Program** report prepared by HSI Geotrans for Lockheed Martin Corporation. This report presents analytical results from samples collected at Bunker Hill Basin Production Wells in January of 2000. Laboratory Quality Assurance/Quality Control documentation is included in Attachment B of the report.

Should you have any comments or requests, please contact me at (818) 847-0791.

Sincerely,

Thomas D. Blackman

Technical Project Manager

TDB:eah:mg

Enclosures

cc: See Attached Distribution List

Mr. Gerard Thibeault March 28, 2000 RED0300/028 Page 3

Distribution

cc: (Abbreviated Report Without Attachments "A & B" Which are Available Upon Request)

Kim Alexander, Psomas Engineering Chris Bahnsen, San Bernardino Valley Water Conservation District Kalyanpur Baliga, Department of Health Services (San Bernardino) Henry Dennis, Mountain View Power Co. Dodie Farmer, Victoria Farms Mutual Water Company Douglas Headrick, City of Redlands Ross Lewis, Gage Canal Company Kevin Mayer, US EPA (Region IX) Steve Mains, Western Municipal Water District Morris Matson, Loma Linda University Eugene McMeans, Riverside Highland Water Company Zahra Panahi, City of Riverside Dan Randall, City of Riverside Bob Reiter, San Bernardino Valley Municipal Water District Toby Roy, Department of Health Services (San Diego) Jon Satrom, USAF, Norton Air Force Base Alain Sharp, Earth Technology Corporation Greg Snyder, City of Loma Linda

Joseph Stejskal, City of San Bernardino Dieter Wirtzfeld, City of Riverside

3150 Bristol Street Suite 500 Costa Mesa, California 92626

A TETRA TECH COMPANY

714-513-1415 FAX 714-513-1278

March 29, 2000

Lockheed Martin Corporation West Coast Project Office 2550 N. Hollywood Way, 3rd Floor Burbank, California 91505

Attention:

Mr. Eric Hodder

Project Supervisor

Subject:

January 2000 Data Report

Water Supply Contingency Plan Production Well Sampling Program Crafton-Redlands Plume Project

Dear Mr. Hodder:

This report presents a summary of results of the Water Supply Contingency Plan production well sampling for the month of January 2000. The Water Supply Contingency Plan (WSCP) was prepared by Lockheed Martin Corporation and submitted to the State of California Regional Water Quality Control Board (RWQCB) Santa Ana Region on September 30, 1996. The plan was conditionally approved by the RWQCB in a letter dated March 6, 1997. The WSCP for the Crafton-Redlands Plume was prepared to address maintenance of water supply to purveyors in the event that wells became impacted with trichloroethene (TCE) from the Crafton-Redlands TCE Plume. A summary of key dates and WSCP sampling program evolution is provided on Table 1.

The locations of the WSCP wells and analytical results for the January 2000 sampling event for TCE and perchlorate are shown on Figures 1 and 2, respectively. Table 2 presents a summary of analytical tests performed on each WSCP well and water system sampling point. The sampling frequency of each well is once a month for the first year. An alternate frequency, if required, is based on the analytical results as outlined in the WSCP TCE and perchlorate decision matrices, provided as Figures 3 and 4, respectively. The perchlorate decision matrix was presented in the *Perchlorate Work Plan and Schedule*, which was submitted, to the RWQCB on August 15, 1997. The RWQCB approved the

Perchlorate Work Plan on October 31, 1997. Table 3 presents a summary of the wells sampled twice monthly according to the decision matrices.

RESULTS

A summary of the analytical results for the January 2000 WSCP sampling event for TCE and perchlorate is shown on Figures 1 and 2, respectively, and presented on Table 4. Available groundwater elevation data is provided on Table 5. The water sampling field forms are provided in Attachment A. Chain-of-custody, laboratory data sheets, and Level III Modified laboratory quality assurance/quality control (QA/QC) documentation is provided in Attachment B.

Trichloroethene

Four groundwater samples collected in January met or exceeded $2/5^{th}$ the MCL for TCE (2.0 μ g/L) including: Gage 26-1 (8.3 μ g/L), Gage 27-1 (7.1 μ g/L), COLL Mountain View #2 (3.3 μ g/L), and COLL Richardson #2 (4.2 μ g/L). Gage 26-1 and Gage 27-1 were placed into TCE treatment in May 1999; therefore, they will be sampled once a month.

The TCE impacts observed at Gage 29-2 and Gage 29-3 are partially attributed to the Norton AFB plume and partially attributed to the Crafton Redlands plume, thus Gage 29-2 and Gage 29-3 are sampled twice a month for TCE when active. In January Gage 29-2 and Gage 29-3 were off-line and not sampled.

Water from COLL Richardson #2 was not pumped into the system and therefore a confirmation sample was not collected. The COLL Mountain View #2 well was off line for most of January, thus, a confirmation sample from Mountain View #2 was not collected.

The COLL Richardson Blend sampling point was not sampled in January because during the month of January, only the Richardson #3 well was pumping into the Richardson system. Thus, sampling of Richardson Blend was considered redundant.

Perchlorate

Groundwater samples collected from five wells in January met or exceeded 75 percent (13.5 μ g/L) of the PAL for perchlorate including: Gage 92-1 (24 μ g/L, 14 μ g/L), COLL Mountain View #2 (40 μ g/L), COLL Richardson #1 (30 μ g/L), COLL Richardson #2 (47 μ g/L), and the Mountain View Blend at Lawton (15 μ g/L). Gage 29-2, Gage 29-3, Gage 51-1, Gage 92-1 and COLL Mountain View #2 wells are currently being sampled on a twice a month basis for perchlorate, if active. Gage 29-2, Gage 29-3, and Gage 51-1 were off-line in January and thus were not sampled.

The COLL Mountain View #2 well was off line and not sampled during the January mid-month sampling. A confirmation sample from Mountain View Blend at Lawton was not collected because only Mountain View #3 and Richardson #3 were pumping, which were both below detection limits for perchlorate. Thus sampling of Mountain View Blend at Lawton was considered redundant. A confirmation sample from Richardson #1 was not collected because the well was off line.

The perchlorate impacts observed at COLL Richardson #1 and Richardson #2 are consistent with historic data when both wells have been idle and sampled shortly after the wells are turned on. As stated above, water from both Richardson #1 and Richardson #2 was not pumped into the system and therefore confirmation samples were not collected.

CLOSING

HSI GeoTrans greatly appreciates being of continued service to Lockheed Martin Corporation on this project. Should you have any questions or comments, please do not hesitate to call.

Sincerely,

HSI GEOTRANS

Roy J. Marroquin

Rroject Manager

James C. Norman, R.G.) C.HG.

Project Director

TABLES

TABLE 1

KEY PROJECT DATES AND WSCP SAMPLING PROGRAM EVOLUTION

August 2, 1996, the RWQCB - Santa Ana Region requested Lockheed Martin to submit a conceptual Water Supply Contingency Plan.

September 30, 1996, Lockheed Martin submitted the Water Supply Contingency Plan (WSCP) to the RWQCB – Santa Ana Region.

March 6, 1997, the RWQCB conditionally approved the WSCP, which included sampling eight production wells (City of Loma Linda Richardson #1, Richardson #2, Mountain View #1, Mountain View #2, Victoria Farms Mutual Water Company Wells #1 and #3, and Southern California Edison #1 and #2).

June 1997, Victoria Farms Mutual Water Company was connected to City of San Bernardino Water. Pumping ceased at VFMWC #1 and #3, and the two wells were removed from the program.

June 1997, sampling of SCE #1 was discontinued because it is not operated on a regular basis. The WSCP consists of five wells, including COLL Mountain View #1 and #2, COLL Richardson #1 and #2, and SCE #2 (AUX).

August 1997, the WSCP was expanded due to the detection of perchlorate in municipal supply wells in the Bunker Hill Basin. Twenty-six wells were added to the WSCP including nineteen City of Riverside wells, five City of Redlands wells, and two Loma Linda University wells, for a total of 31 wells.

October 1997, three City of Riverside water system sampling points were added to the WSCP, including the Gage system pipeline (Gage Delivery), the Waterman system pipeline (Iowa Booster), and the sampling station measuring outflow from the Linden and Evans Reservoirs (7th & Chicago).

March 1998, two City of Loma Linda water system sampling points were added to the WSCP, including the Mountain View system pipeline (Mountain View Blend at Lawton) and the Richardson system pipeline (Richardson Blend).

June 1998, one City of Riverside irrigation water system sampling point (Gage Arlington) and one additional City of Loma Linda water system sampling point (Mountain View Blend at Timoteo) were added to the WSCP.

December 1998, the COLL Richardson #3 well was added to the WSCP Sampling Program.

May 1999, Sampling of Mountain View Blend at Timoteo was discontinued because it does not represent a blend sample of the Mountain View pipeline system.

December 1999, the COLL Mountain View #3 well and the Gage 98-1 well were added to the WSCP Sampling Program.

TABLE 2
WSCP PRODUCTION WELL SAMPLING PROGRAM

HSI#	Well Name	Perchlorate	TCE
	Linda Linda	The Target of the Company	
692	Mountain View #2	X	X
3106	Mountain View #3	X	X
693	Richardson #1	X	X
694	Richardson #2	$\frac{\hat{x}}{x}$	X
707	Richardson #3	X	X
	Linda Water System Sampling Points		
2967	Mountain View Blend - Lawton	X	X
2968	Richardson Blend	X	X
	lifornia Edison		
554	SCE#2(AUX)	X	Χ
Loma Linda I			
267	LLUniv Anderson #2	X	
717	LLUniv Anderson #3	X	
	side (Gage System)		
252	Gage#26-1	X	X
258	Gage#27-1	X	X
259	Gage#27-2	X	X
260	Gage#29-1	X	X
219	Gage#29-2	X	X
220	Gage#29-3	X	X
218	Gage#30-1	X	X
214	Gage#31-1	X	X
215	Gage#46-1	X	X
253	Gage#51-1	X	X
216	Gage#56-1	X	X
257	Gage#66-1	X	X
644	Gage#92-1	X	X
641	Gage#92-2	X	X
642	Gage#92-3	X	X
3091	Gage#98-1	X	X
City of Rivers		A TOTAL CONTRACTOR OF THE PARTY	
273	Hunt#6	X	<u></u>
271	Hunt#10	X	
272	Hunt#11	X	
	side Water System Sampling Points		ale o some se come
2946	Iowa Booster (Waterman)	X	X
2947	Gage Delivery (Gage)	X	X
2948	7th & Chicago (Reservoir)	X	X
3018	Gage Arlington	X	
City of Redla			
542	COR Church St	X	
2673	COR#38	X	
535	COR Mentone Acres	X	
29	COR Orange st	X	
74	CORRees	X	Χ
Notes:	100111000		

Notes:

TCE = Trichloroethene

Perchlorate analyzed using DHS Method (EPA 300.0 Modified)

TCE analyzed using EPA Method 502.2

TABLE 3

WSCP PRODUCTION WELL SAMPLING PROGRAM JANUARY 2000 WELLS SAMPLED TWICE MONTHLY

HSI#	Well Name	Perchlorate	TCE
City of Loma Linda			
692	Mountain View #2	X	
City of Riverside (Gage System)			
219	Gage #29-2	Х	X
220	Gage #29-3	X	X
253	Gage #51-1	X	
644	Gage #92-1	X	

Notes:

TCE = Trichloroethene

Perchlorate analyzed using DHS Method (EPA 300.0 Modified).

TCE analyzed using EPA Method 502.2.

TABLE 4 WSCP PRODUCTION WELL SAMPLING PROGRAM JANUARY 2000 DATA RESULTS

HSI#	Well Name	Sample Date	Perchlorate (µg/L) Del Mar	TCE (µg/L) Del Mar
City of Loma Li	nda		Tables 1, and applicate to the control of the contr	
692	Mountain View #2	1/4/00	40 ^d	3.3 ^d
692	Mountain View #2*	NS	NS	NA
3106	Mountain View #3	1/4/00	ND(4)	ND(0.5)
693	Richardson #1	1/4/00	30 ^{c, d}	1.7 ^{c, d}
693	MUN-768	1/4/00	29 ^{c, d}	1.8 ^{c, d}
694	Richardson #2	1/4/00	47 ^{c, d}	4.2 ^{c, d}
707	Richardson #3	1/4/00	ND(4)	ND(0.5)
	nda Water System Sampling Points			
2967	Mountain View Blend-Lawton	1/4/00	15	0.66
2968	Richardson Blend	NS	NS	NS
Mountain View	Power (Formerly Southern Californi	a Edison)	The second secon	alian de la companya
554	SCE#2(AUX)	1/3/00	ND(4)	ND(0.5)
Loma Linda Un			in the second se	. asi v lainda lain. Liin laid la
267	LLUniv Anderson #2	1/3/00	6.1	NA
717	LLUniv Anderson #3	1/3/00	ND(4)	NA
City of Riversid	e (Gage System)			
252	Gage#26-1 ^b	1/3/00	12	8.3
258	Gage#27-1 ^b	1/3/00	7.3	7.1
259	Gage#27-2	NS	NS	NS
260	Gage#29-1	1/3/00	9.2	ND(0.5)
219	Gage#29-2	NS	NS	NS
219	Gage 29-2*	NS	NS	NS
220	Gage#29-3	NS	NS	NS
220	Gage#29-3*	NS	NS	NS
218	Gage#30-1	NS	NS	NS
214	Gage#31-1	NS	NS	NS
215	Gage#46-1	NS	NS	NS
253	Gage#51-1	NS	NS	NS
253	Gage#51-1*	NS	NS	NA
216	Gage#56-1	NS	NS	NS
257	Gage#66-1	NS	NS	NS
644	Gage#92-1	1/3/00	24	1.7
644	MUN-767	1/3/00	24	1.5
644	Gage#92-1*	1/12/00	14	NA NA
641	Gage#92-2	1/3/00	ND(4)	ND(0.5)
642	Gage#92-3	1/3/00	ND(4)	ND(0.5)
3091	Gage#98-1	1/3/00	ND(4)	ND(0.5)
	e (Waterman System)			
273	Hunt#6	NS	NS	NA NA
271	Hunt#10	NS	NS	NA NA
272	Hunt#11	NS	NS	NA NA
City of Riversid	e Water System Sampling Points		71.77.77.77.77.77	
	Iowa Booster (Waterman)	1/4/00	ND(4)	ND(0.5)
2947	Gage Delivery (Gage)	1/4/00	ND(4)	ND(0.5)
2948	7th & Chicago (Reservoir)	1/4/00	ND(4)	ND(0.5)
3018	Gage Arlington	1/4/00	6.9	NA
City of Rediand			The second of th	, 11 = = 1 123
542	COR Church St ^a	NS	NS	NA
2673	COR#38ª	NS	NS	NA NA
535	COR Mentone Acresa	NS	NS	NA
29	COR Orange Sta	NS	NS	NA
74	COR Rees	NS	NS	NS

Notes:

= Twice-monthly sampling result
 = Confirmation sampling results

ND(4) = Not detected at the specified limit

MUN = Duplicate sample collected from the well listed directly above

NA = Not Analyzed NS = Not Sampled TCE = Trichloroethene

Perchlorate analyzed using DHS Method (EPA 300.0 Modified) TCE analyzed using EPA Method 502.2

- = Well sampled on quarterly basis, if active
 - = Gage 26-1 and Gage 27-1 are currently
 - being treated for TCE
- = Water purged to waste and not into system
- = Concentration in well is a result of cross flow between hydrostratigraphic units

TABLE 5

SUMMARY OF WATER LEVEL MEASUREMENTS JANUARY 2000 SAMPLING EVENT

11614	Well Name	Manage Park	Depth to Water	Measuring Point Elevation	Groundwater Elevation	0
HSI#		Measure Date	water			Comments
CITY OF LOMA LINDA 992 Mountain View #2 01/04/00 168 1085 917 Static						
692	Mountain View #2	01/04/00	168	1085		Static
3106	Mountain View #3	01/04/00	101	1086	985	Pumping
693	Richardson #1	01/04/00	141	1077	936	Static
694	Richardson #2	01/04/00	134	1078	944	Static
707	Richardson #3	01/04/00	198	1085	887	Pumping
	California Edison		·····			
554	SCE#2(AUX)	NM	NM	1100.00	NM	Pumping
	a University			And the stand designed designed at the standard of the standar	······	
267	LLUniv Anderson #2	NM	NM	1075	NM	Pumping
717	LLUniv Anderson #3	NM	NM	1070	NM	Pumping
	erside (Gage System)			·	NAME OF STREET	
252	Gage#26-1	01/04/00	90.00	1045.33	955.33	Pumping
258	Gage#27-1	01/04/00	89.70	1044.64	954.94	Pumping
259	Gage#27-2	01/04/00	74.00	1044.64	970.64	Static
260	Gage#29-1	01/04/00	83.30	1044.43	961.13	Pumping
219	Gage#29-2	01/04/00	66.90	1046.31	979.41	Static
220	Gage#29-3	01/04/00	62.70	1048.75	986.05	Static
218	Gage#30-1	01/04/00	100.80	1054.17	953.37	Static
214	Gage#31-1	01/04/00	70.00	1054.64	984.64	Static
215	Gage#46-1	01/04/00	74.90	1065.50	990.60	Static
253	Gage#51-1	01/04/00	86.60	1044.64	958.04	Static
216	Gage#56-1	01/04/00	124.20	1065.50	941.30	Static
257	Gage#66-1	01/04/00	88.00	1044.85	956.85	Static
644	Gage#92-1	01/04/00	141.20	1047.78	906.58	Pumping
641	Gage#92-2	01/04/00	167.90	1053.38	885.48	Pumping
642	Gage#92-3	01/04/00	161.90	1058.78	896.88	Pumping
3091	Gage#98-1	01/04/00	155.80	1058.78	902.98	Pumping
City of Riverside (Waterman System)						
273	Hunt#6	NM	NM	1015.5	NM	Pumping
271	Hunt#10	NM	NM	1017	NM	Pumping
272	Hunt#11	NM	NM	1015.7	NM	Pumping
City of Redlands						
542	COR Church St	Jan-00	114.0	1344.8	1230.8	Static
2673	COR#38	Jan-00	153.0	NA	NA	Pumping
535	COR Mentone Acres	Jan-00	252.0	1506.4	1254.4	Static
29	COR Orange st	Jan-00	110.0	1282	1172.0	Static
74	COR Rees	Jan-00	243.0	1490	1247.0	Pumping

Notes:

All measurements reported in feet below measuring point (ft-bmp)

Water level measurements for all City of Loma Linda, City of Riverside, and City of Redlands wells were obtained by purveyor personnel.


Elevations given in feet above mean sea level (ft-msl)


NM=Not measured


NA=Data not available


Static water levels were allowed to recover a minimum of 30 minutes to obtain a static water level measurement

FIGURES

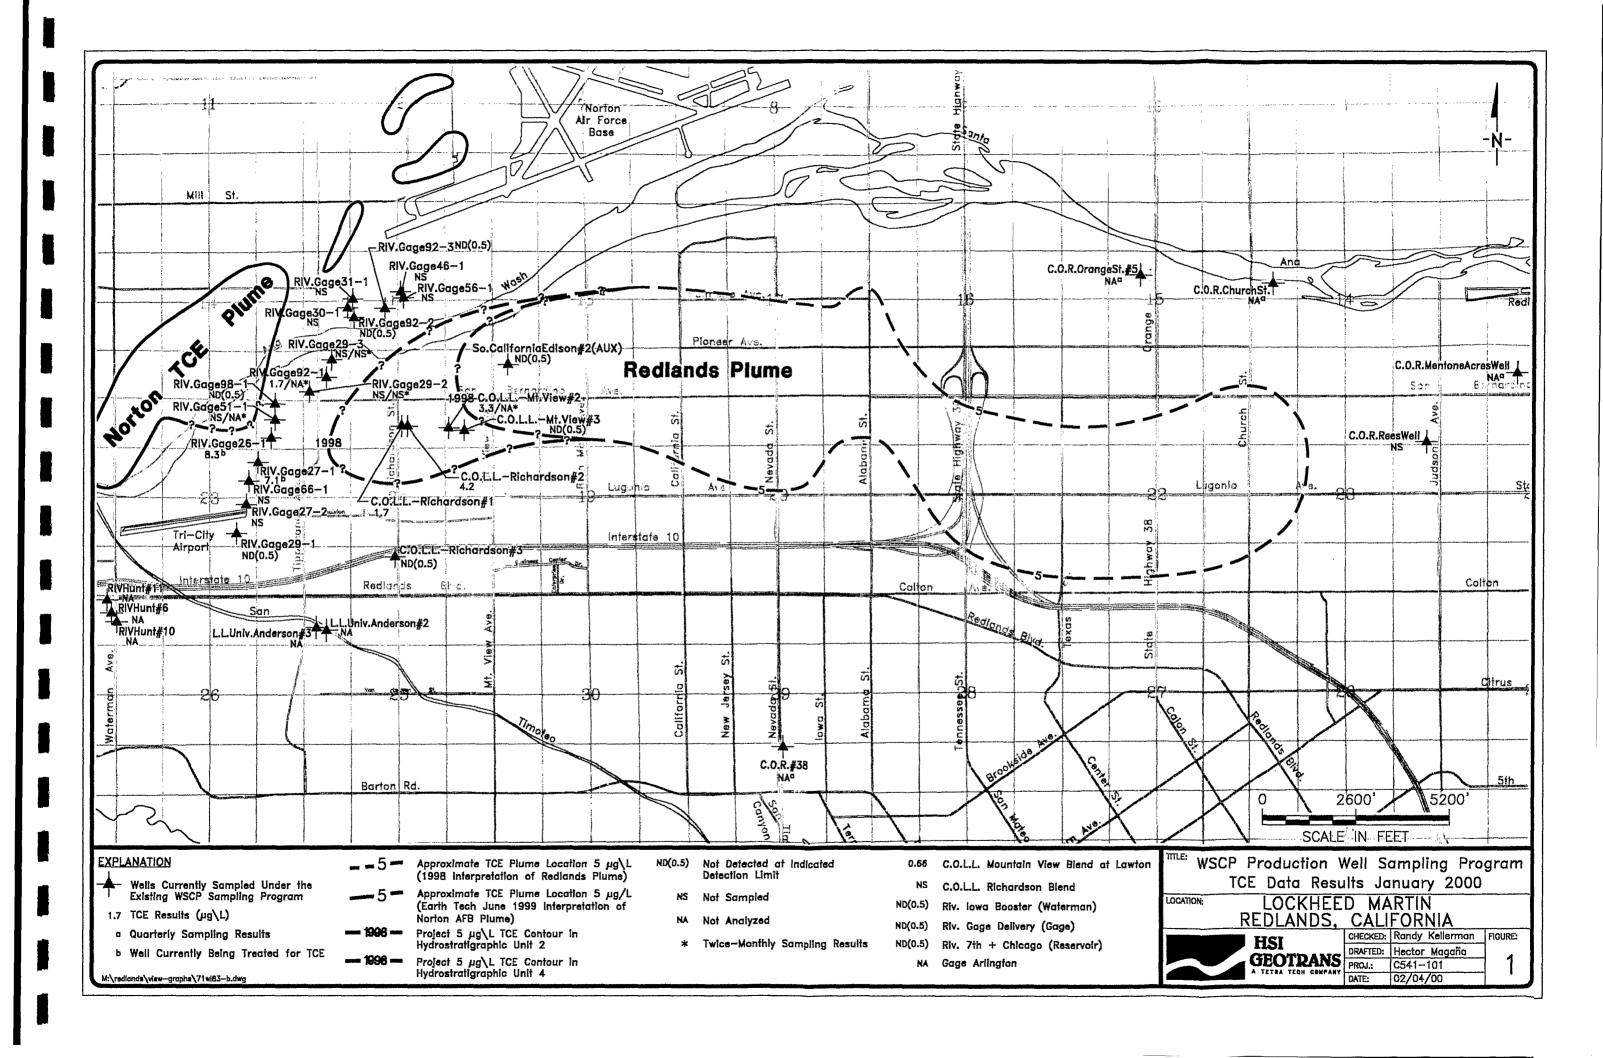

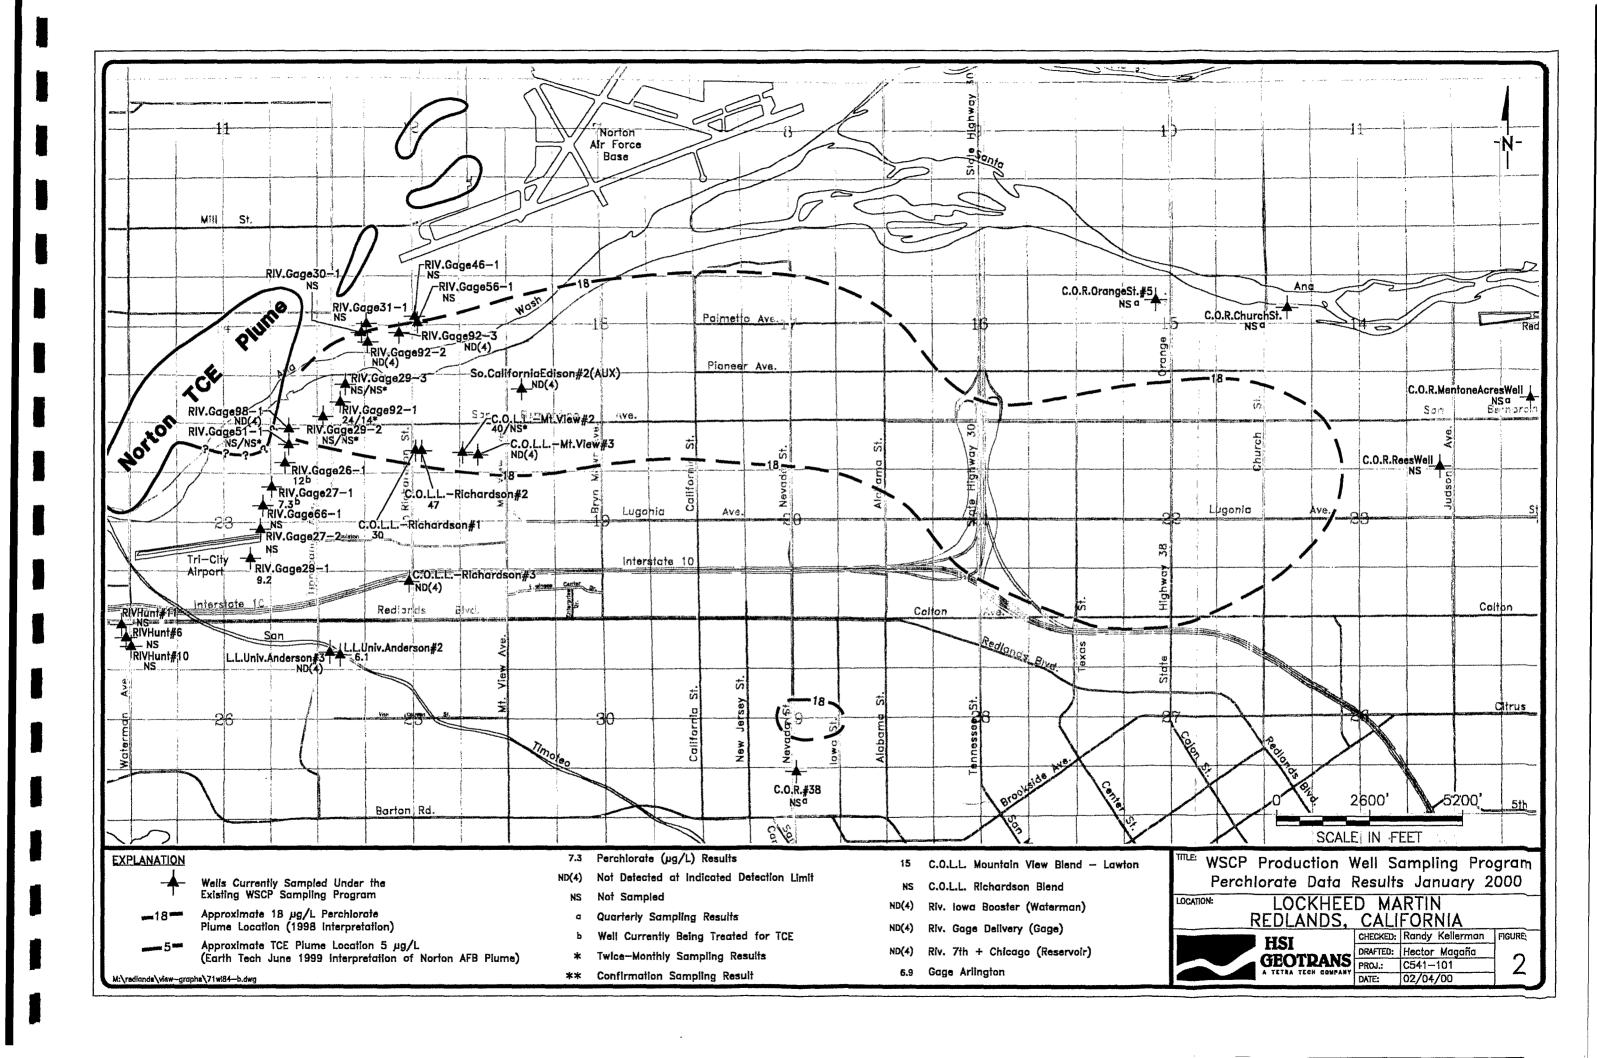

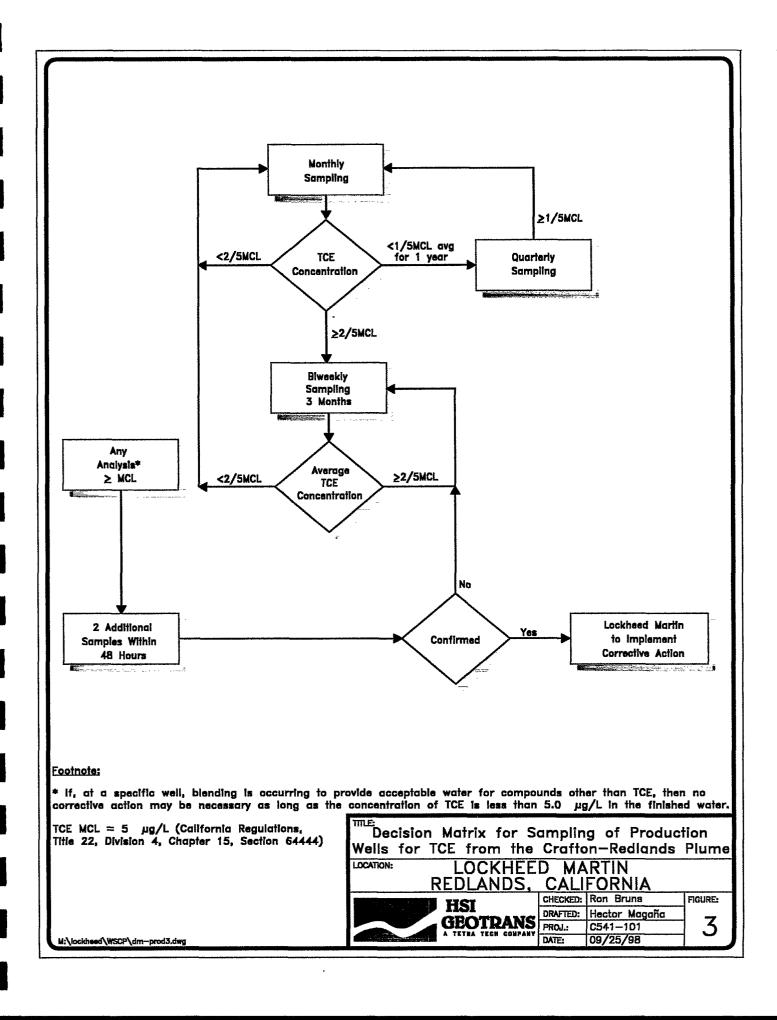

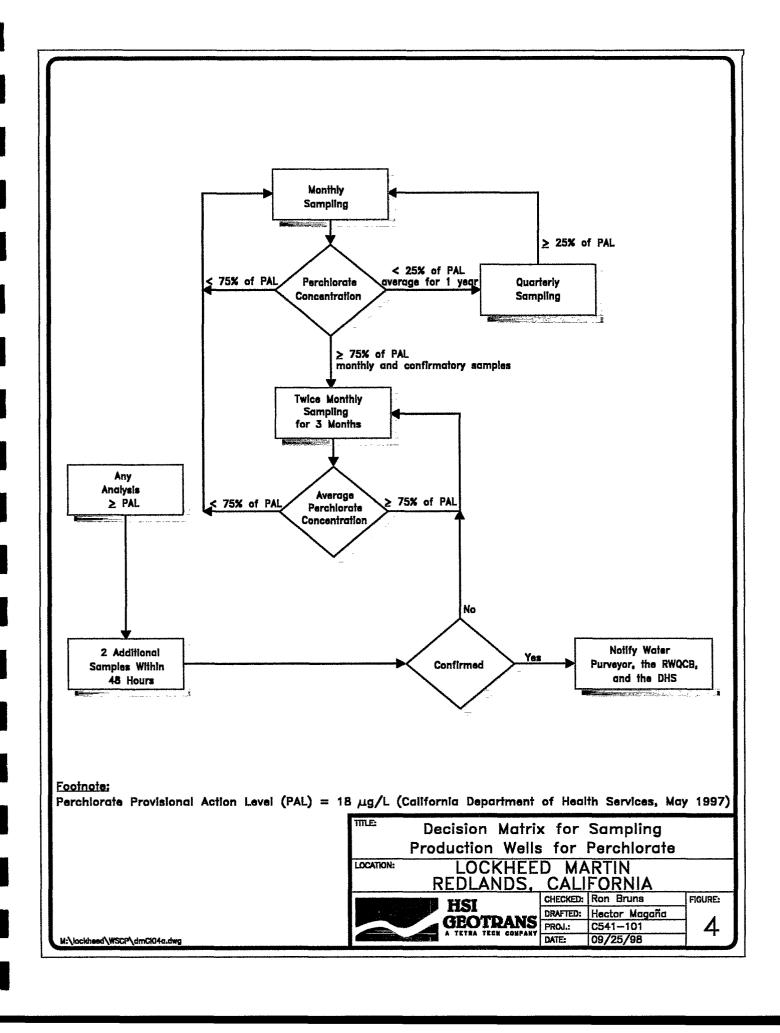

ATTACHMENT A
GEOLIS FIELD FORMS

ATTACHMENT A

GEOLIS FIELD FORMS (Available Upon Request)

ATTACHMENT B

CHAIN-OF-CUSTODY RECORDS AND
LABORATORY DATA SHEETS
QUALITY ASSURANCE/QUALITY CONTROL DOCUMENTATION

ATTACHMENT B

CHAIN-OF-CUSTODY RECORDS AND
LABORATORY DATA SHEETS AND LEVEL III MODIFIED
QUALITY ASSURANCE/QUALITY CONTROL DOCUMENTATION
(Available Upon Request)